


Naaldhulslager BRI82012-IKO - BRI82012-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/bri82012-iko>

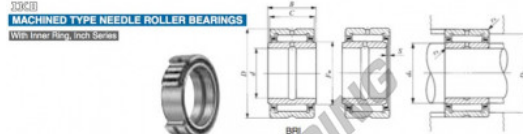

Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm(inch)					
			d	D	C	B	F_w	⁽¹⁾ S
12.700 ($\frac{1}{2}$)	BRI 82012	79.5	12.700 $\frac{1}{2}$	31.750 (1 $\frac{1}{4}$)	19.050 ($\frac{3}{4}$)	19.300	19.050 ($\frac{3}{4}$)	0.3
Standard mounting dimensions mm			ISO cyclic load rating C	ISO static load rating C_0	Allowable rotational speed ⁽²⁾	Assembled inner ring		
d_s	D_s	$r_{as\ max}$	N	N	rpm	LRB 81212		
Min. 17.5	Max. 18	1	21 700	24 400	20 000			

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952375168
Binnendiameter	12.7 mm
Buitendiameter	31.75 mm
Dikte	19.3 mm
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE