


## Naaldtaatslager AZK6013010-IKO - AZK6013010-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldtaatslager/azk6013010-iko>

**IKO**  
**THRUST BEARINGS**

Thrust Roller Bearings

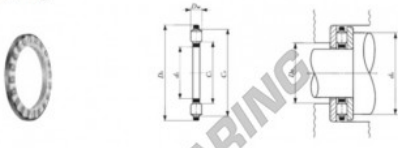

| Shaft dia.<br>mm | Identification number |               |                       |               |                 |                 |               |  |
|------------------|-----------------------|---------------|-----------------------|---------------|-----------------|-----------------|---------------|--|
|                  | Thrust roller bearing | Mass (Ref.) g | Thrust roller bearing | Mass (Ref.) g | Inner ring      | Outer ring      | Mass (Ref.) g |  |
| 60               | <b>AZ 6013026</b>     | 2 090         | <b>AZK 6013010</b>    | 790           | <b>WS 60130</b> | <b>GS 60130</b> | 660           |  |

| Boundary dimensions<br>mm |     |    |                |                |                |   |                    |                |                | Standard mounting<br>dimensions mm | Basic dynamic<br>load rating<br>C | Basic static<br>load rating<br>C <sub>0</sub> | Allowable<br>rotational<br>speed <sup>(2)</sup> |       |
|---------------------------|-----|----|----------------|----------------|----------------|---|--------------------|----------------|----------------|------------------------------------|-----------------------------------|---|---|-------|
| d                         | D   | T  | d <sub>c</sub> | D <sub>c</sub> | D <sub>w</sub> | B | r <sub>s</sub> (1) | C <sub>1</sub> | C <sub>2</sub> | d <sub>4</sub><br>Min.             | D <sub>4</sub><br>Max.            | N   | N   | rpm   |
| 60                        | 130 | 26 | 60.05          | 129.5          | 10             | 8 | 1.5                | 79             | 119            | 119                                | 80                                | 158 000                                       | 634 000   | 3 000 |

Notes: (1) Minimum allowable value of chamfer dimension r  
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

### PRODUCTKENMERKEN

|                |               |
|----------------|---------------|
| Merk           | IKO           |
| N° Ean13       | 3616060466075 |
| Binnendiameter | 60 mm         |
| Buitendiameter | 130 mm        |
| Dikte          | 10 mm         |
| Gewicht        | 790 g         |
| Verpakking     | -             |
| Standaard      | -             |

[contact@123kogellager.be](mailto:contact@123kogellager.be)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE