


## Naaldtaatslager AZK10019015-IKO - AZK10019015-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldtaatslager/azk10019015-iko>

**IKO**

**THRUST BEARINGS**

Thrust Roller Bearings

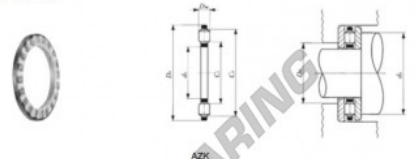

| Shaft dia.<br>mm | Identification number |               |                       |               |                  |                  |               |  |
|------------------|-----------------------|---------------|-----------------------|---------------|------------------|------------------|---------------|--|
|                  | Thrust roller bearing | Mass (Ref.) g | Thrust roller bearing | Mass (Ref.) g | Inner ring       | Outer ring       | Mass (Ref.) g |  |
| 100              | <b>AZ 10019039</b>    | 5 960         | <b>AZK 10019015</b>   | 2 120         | <b>WS 100190</b> | <b>GS 100190</b> | 1 920         |  |

| Boundary dimensions<br>mm |     |    |                |                |                |    |                    |                |                | Standard mounting<br>dimensions mm | Basic dynamic<br>load rating<br>C | Basic static<br>load rating<br>C <sub>0</sub> | Allowable<br>rotational<br>speed <sup>(2)</sup> |       |
|---------------------------|-----|----|----------------|----------------|----------------|----|--------------------|----------------|----------------|------------------------------------|-----------------------------------|---|---|-------|
| d                         | D   | T  | d <sub>c</sub> | D <sub>c</sub> | D <sub>w</sub> | B  | r <sub>s</sub> (1) | C <sub>1</sub> | C <sub>2</sub> | d <sub>4</sub><br>Min.             | D <sub>4</sub><br>Max.            | N   | N   | rpm   |
| 100                       | 190 | 39 | 100.1          | 189.3          | 15             | 12 | 1.5                | 119            | 179            | 177                                | 120                               | 333 000                                       | 1 420 000                                       | 2 000 |

Notes: (1) Minimum allowable value of chamfer dimension r.  
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

### PRODUCTKENMERKEN

|                |               |
|----------------|---------------|
| Merk           | IKO           |
| N° Ean13       | 3616060466174 |
| Binnendiameter | 100 mm        |
| Buitendiameter | 190 mm        |
| Dikte          | 15 mm         |
| Gewicht        | 2120 g        |
| Verpakking     | 1             |

[contact@123kogellager.be](mailto:contact@123kogellager.be)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE