


Naaldtaatslager AZK20026520-IKO - AZK20026520-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldtaatslager/azk20026520-iko>

IKO

THRUST BEARINGS

Thrust Roller Bearings

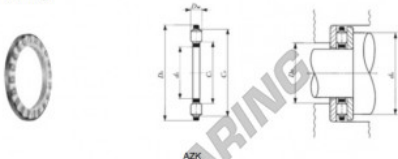

Shaft dia. mm	Identification number						
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g
200	AZ 20026548	8 430	AZK 20026520	3 250	WS 200265	GS 200265	2 590

Boundary dimensions mm										Standard mounting dimensions mm	Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾	
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d ₄ Min.	D ₄ Max.	N	N	rpm
200	265	48	200.15	264	20	14	2	215	255	254	216	465 000	2 080 000	1 300

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060466822
Binnendiameter	200 mm
Buitendiameter	265 mm
Dikte	20 mm
Gewicht	3250 g
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE