


SA Stangkop BRM10-60-502-DURBAL - BRM10-60-502-DURBAL

https://www.123kogellager.be/kogellager-behuizing/stangkop/sa/brm10-60-502-durbal

BRM10-60-502

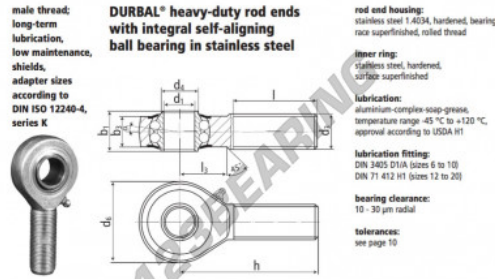

male thread:
long-term
lubrication,
low maintenance,
shields,
adapter sizes
according to
DIN ISO 12240-4,
series K

**DURBAL® heavy-duty rod ends
with integral self-aligning
ball bearing in stainless steel**

rod end housing:
stainless steel 1.4024, hardened, bearing
race superfinished, rolled thread

inner ring:
stainless steel, hardened,
surface superfinished

lubrication:
aluminium-complex-soap-grease,
temperature range -45 °C to +120 °C,
approval according to USDA H1

lubrication fitting:
DIN 3402 D10k (sizes 6 to 10)
DIN 71 412 H1 (sizes 12 to 20)

bearing clearance:
10 - 30 µm radial

tolerances:
see page 10

order number		measurements [mm]							
type	right-hand thread	d ₁	d ₂	d ₄	d ₅	b ₁	b ₂	h	
BRM 10 -60	-502	10	M 10	12,0	28	14	10,5	48	
measurements [mm]		weight		calculation-factors	rotational speed limit	basic load rating			
type	l	l ₂	α [°]	Y	v _{lim} [min ⁻¹]	C _d [N]	C _s [N]		
BRM 10	29	15	8,0	0,060	1,90	1,81	1225	3100	1000

PRODUCTKENMERKEN

Merk	DURBAL
N° Ean13	3663952509136
Binnendiameter	10 mm
Buitendiameter	28 mm
Dikte	14 mm
Type	SA
Gewicht	60 g
Draad	Linkse draad
Smering	met
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE