


SA Stangkop

BRTM1-1-01-501-DURBAL - BRTM1-1-01-501-DURBAL

<https://www.123kogellager.be/kogellager-behuizing/stangkop/sa/brtm1-1-01-501-durbal>

BRTM1/1-01-501

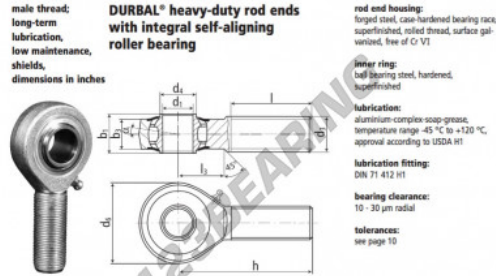

male thread:
long-term
lubrication,
low maintenance,
shields,
dimensions in inches

**DURBAL® heavy-duty rod ends
with integral self-aligning
roller bearing**

rod end housing:
forged steel, case-hardened bearing race,
superfinished, rolled thread, surface gal-
vanized, free of Cr-VI

inner ring:
ball bearing steel, hardened,
superfinished

lubrication:
aluminum-complex-soap-grease,
temperature range -45 °C to +120 °C,
approval according to USDA H1

lubrication fitting:
DIN 71 412 H1

bearing clearance:
10 - 30 µm radial

tolerances:
see page 10

order number		measurements [inches]								
type	right hand thread	left hand thread	d ₁	d ₂ class 2	d ₄	d ₅	d ₆	b ₁	b ₂	b ₃
BRTM 1/1	-01	-501	1.000	1.0000-14 UNS	1.161	2.519	1.220	.866		
		measurements [inches]			weight	rotational speed limit rpm [min ⁻¹]	basic load rating dyn. C [N]		stat. C ₀ [N]	
type	h	l	b ₂	α [°]	[kg]					
BRTM 1/1	3.720	2.264	1.279	5,0	0.590	600	24900	18500		

PRODUCTKENMERKEN

Merk	DURBAL
N° Ean13	3663952509983
Binnendiameter	25.4 mm
Buitendiameter	63.98 mm
Dikte	30.99 mm
Type	SA
Gewicht	590 g
Draad	Rechtse draad
Smering	met
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE