


Naaldhulslager YTL59-IKO - YTL59-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ytl59-iko>

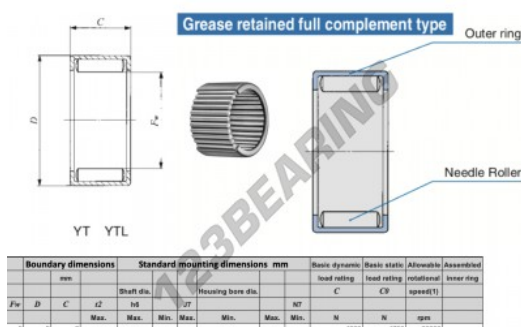

Boundary dimensions		Standard mounting dimensions mm						Basic dynamic load rating		Basic static load rating		Allowable rotational speed (1)	Assembled inner ring
mm		Shaft dia.	Housing bore dia.		HT	C	CP	N	N	rpm			
Fw	D	C	d2	H	JT	Max.	Min.	Max.	Min.	N	N	rpm	
5	9	9	9	9	9	4.32	4.75	30000	--				

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060598691
Binnendiameter	5 mm
Binnendiameter	0.197" inch
Buitendiameter	9 mm
Buitendiameter	0.354" inch
Dikte	9 mm
Dikte	0.354" inch
Grenstoerental	30000 rpm
Dynamische belasting	4.32 kN
Statische belasting	4.75 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE