


Naaldhulslager TAM2830-IKO - TAM2830-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/tam2830-iko>

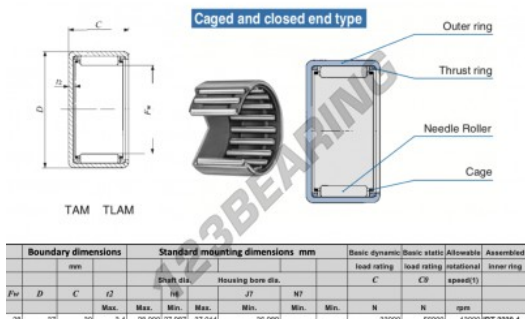

| Boundary dimensions | | | Standard mounting dimensions mm | | | | | | Basic dynamic load rating | | Basic static load rating | | Allowable rotational speed(°C) | Assembled inner ring |
|---------------------|----|----|---------------------------------|------|-------------------|--------|--------|--------|---------------------------|-------|--------------------------|--|--------------------------------|----------------------|
| Fw | D | C | Shaft dia. | | Housing bore dia. | | | | C | CP | rpm | | | |
| | | | Max. | Min. | Max. | Min. | Max. | Min. | N | N | 1000 | | RT 2330-1 | |
| | 28 | 37 | 30 | 3,4 | 28,000 | 27,987 | 37,014 | 36,989 | — | 33000 | 56900 | | | |

PRODUCTKENMERKEN

| | |
|----------------------|---------------|
| Merk | IKO |
| N° Ean13 | 3616060599377 |
| Binnendiameter | 28 mm |
| Buitendiameter | 37 mm |
| Dikte | 30 mm |
| Grenstoerental | 15000 rpm |
| Dynamische belasting | 33 kN |
| Statische belasting | 56.9 kN |
| Verpakking | 1 |

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE