


Naaldhulslager TAM3825-IKO - TAM3825-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/tam3825-iko>

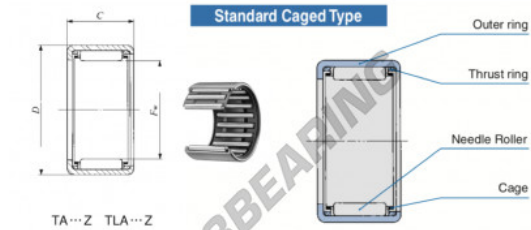

Boundary dimensions		Standard mounting dimensions mm						Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
mm		Shaft dia.		Housing bore dia.				C	C ₀	rpm	
Fw	D	r2	rd	J7	Min.	Max.	Min.	Max.	N	N	gmm
36.48	48	25	3.4	38.000/37.994	48.014	47.989	—	—	30600	63100	9000/RT 3225-1

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060599667
Binnendiameter	38 mm
Buitendiameter	48 mm
Dikte	25 mm
Grenstoerental	9000 rpm
Dynamische belasting	35.6 kN
Statische belasting	63.1 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE