


Naaldhulslager TAM6030-IKO - TAM6030-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/tam6030-iko>

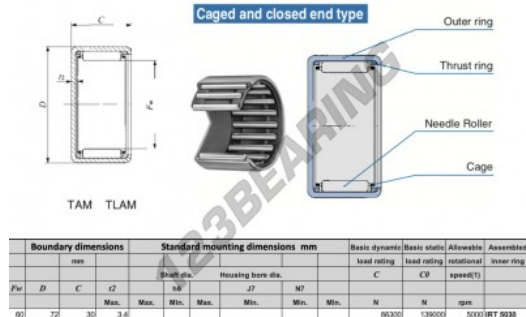

Boundary dimensions			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed		Assembled inner ring	
mm			mm				C		C ₀		rpm		inner ring	
P ₀	D	C	T	W ₀	J ₁	M ₁	M ₂	N	N ₀	N ₁	N ₂	RT	RT	RT
60	72	30	3.4	Max.	Min.	Max.	Min.	Min.	66300	139000	5000	RT	9030	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060599940
Binnendiameter	60 mm
Buitendiameter	72 mm
Dikte	30 mm
Grenstoerental	5000 rpm
Dynamische belasting	66.3 kN
Statische belasting	139 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE