


Naaldhulslager BHAM168-IKO - BHAM168-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/bham168-iko>

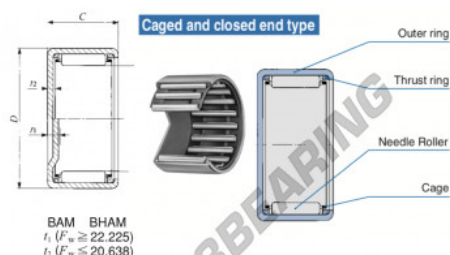

Boundary dimensions mm(inch)			Standard mounting dimensions mm			Back dynamic load rating	Basic static load rating	Allowable axial misalignment	Allowable axial displacement
F_w	D	C	r_1	r_2	d	C	C_0	°	mm
20.490 (0.807)	33.338 (1 5/16)	12.70 (0.500)	3.6						
		Max.	Min.	Min.	Max.	Min.	N	N	rpm
							10000	13100	15000URB 128

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060600424
Binnendiameter	25.4 mm
Binnendiameter	1" inch
Buitendiameter	33.338 mm
Buitendiameter	1 5/16" inch
Dikte	12.7 mm
Dikte	1/2" inch
Grenstoerental	15000 rpm
Dynamische belasting	10.2 kN
Statische belasting	13.1 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE