


Naaldhulslager BHAM2220-IKO - BHAM2220-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/bham2220-iko>

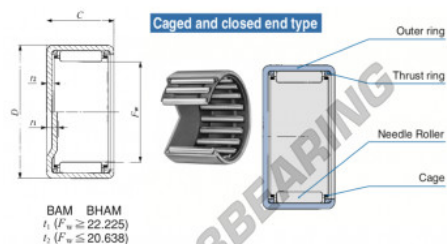

BAM BHAM
 $t_1 (F_w \geq 22.225)$
 $t_2 (F_w \leq 20.638)$

Boundary dimensions mm(inch)			Standard mounting dimensions mm			Basic accuracy	Basic grade	Advanced	Assembled
P ₀₄	B	C	t		Housing bore dia	Basic accuracy	Basic grade	Advanced	Assembled
			Min.	Max.		CP	CP	CP	CP
34.925 (-1.43)	44.45 (-1.43)	31.75 (0.20)	3.41		27	H	H	SP	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060600684
Binnendiameter	34.925 mm
Binnendiameter	1 3/8" inch
Buitendiameter	44.45 mm
Buitendiameter	1 3/4" inch
Dikte	31.75 mm
Dikte	1 1/4" inch
Grenstoerental	10000 rpm
Dynamische belasting	41.2 kN
Statische belasting	74.2 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE