


Naaldhulslager BA167-Z-IKO - BA167-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba167-z-iko>

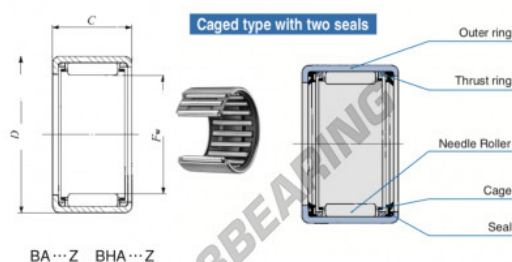

Boundary dimensions mm[inch]			Standard mounting dimensions mm				Basic dynamic		Basic static		Allowable	Assembled
<i>P</i>	<i>D</i>	<i>C</i>	<i>c2</i>	Shaft dia. <i>t6</i>	Housing bore dia. <i>J7</i>		load rating	load rating	rotational	inner ring		
			Max.	Max.	Min.	Max.	Min.	N	N	rpm		
25.400	31.750	11.130	2.5					7720	11100	15000		

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601155
Binnendiameter	25.4 mm
Buitendiameter	31.75 mm
Dikte	11.13 mm
Grenstoerental	15000 rpm
Dynamische belasting	7.72 kN
Statische belasting	11.1 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE