


Naaldhulslager BA168-Z-IKO - BA168-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba168-z-iko>

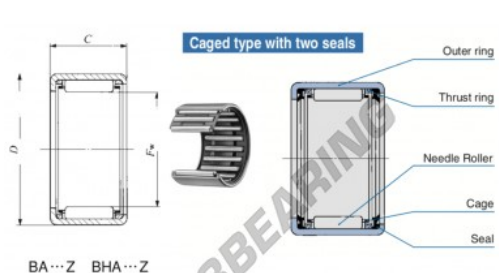

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r/min)	Assembled inner ring
P_{10}	D	C	z_2	b_6	JT	C	C^*			
			Max.	Min.	Max.	Min.	N	N	r/min	
29.400	(1.15750)	(11.417)	12.700	8.000	2.8		6240	12000	15000	IRB

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601162
Binnendiameter	25.4 mm
Buitendiameter	31.75 mm
Dikte	12.7 mm
Grenstoerental	15000 rpm
Dynamische belasting	8.24 kN
Statische belasting	12000 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE