


Naaldhulslager BA1612-Z-IKO - BA1612-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba1612-z-iko>

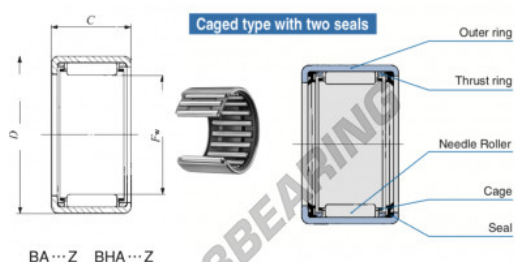

Boundary dimensions mm[inch]			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ¹⁾	Assembled inner ring
<i>F_w</i>	<i>D</i>	<i>C</i>	<i>G</i>	<i>b₆</i>	<i>H₇</i>	<i>C</i>	<i>C₀</i>	rpm		
25.400 (1.0)	31.750 (1.25)	19.050 (0.75)	2.8	Max.	Min.	Max.	Min.	14200	24300	15000 (RB 1212)

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601186
Binnendiameter	25.4 mm
Buitendiameter	31.75 mm
Dikte	19.05 mm
Grenstoerental	15000 rpm
Dynamische belasting	14.2 kN
Statische belasting	24.3 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE