


## Naaldhulslager BA1614-Z-IKO - BA1614-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba1614-z-iko>

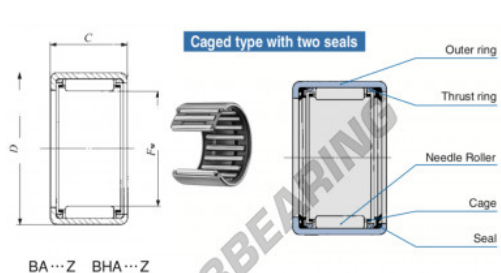

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>(1)</sup>	Assembled inner ring		
<i>F<sub>w</sub></i>	<i>D</i>	<i>C</i>	<i>d<sub>1</sub></i>	<i>d<sub>2</sub></i>	Shaft dia.	Housing bore dia.	<i>C</i>	<i>C<sub>0</sub></i>	<i>n</i>	<i>n<sub>0</sub></i>		
25.400	1.31.750	1.141	22.221	8.751	2.81	25.400	25.387	31.764	16900	30400	15000	RB 1214

### PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601193
Binnendiameter	25.4 mm
Buitendiameter	31.75 mm
Dikte	22.22 mm
Grenstoerental	15000 rpm
Dynamische belasting	16.9 kN
Statische belasting	30.4 kN
Verpakking	1

[contact@123kogellager.be](mailto:contact@123kogellager.be)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE