


Naaldhulslager BA1716-Z-IKO - BA1716-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba1716-z-iko>

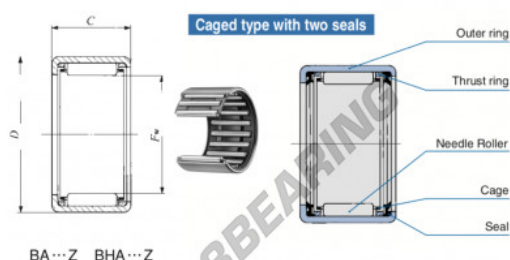

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(I)	Assemblies
<i>F_w</i>	<i>D</i>	<i>C</i>	<i>l₂</i>	<i>h₆</i>	<i>J₇</i>	<i>C</i>	<i>C₀</i>	speed(I)	inner ring	
	Max.	Max.	Max.	Max.	Min.	Max.	Min.	N	N	rpm
26.988 (1)	33.338 (1 1/16)	25.4(1.000)	2.0					20000	38300	14000

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601230
Binnendiameter	26.988 mm
Binnendiameter	1 1/16" inch
Buitendiameter	33.338 mm
Buitendiameter	1 5/16" inch
Dikte	25.4 mm
Dikte	1" inch
Grenstoerental	14000 rpm
Dynamische belasting	20 kN
Statische belasting	38.3 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE