


Naaldhulslager BA186-Z-IKO - BA186-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba186-z-iko>

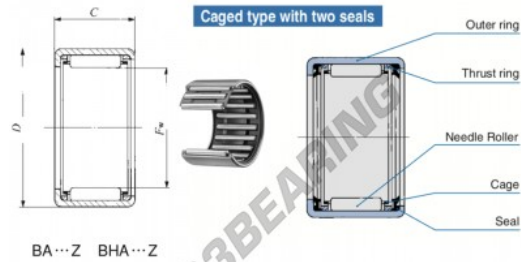

Boundary dimensions mm[inch]			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(l)	Assembled inner ring
F_w	D	C	t_2	H_1	J_1	C	C_0	rpm		
28.575 (1.124)	34.925 (1.375)	9.52 (0.375)	2.5					6330	8910	
								13000	...	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601247
Binnendiameter	28.575 mm
Binnendiameter	1 1/8" inch
Buitendiameter	34.925 mm
Buitendiameter	1 3/8" inch
Dikte	9.52 mm
Dikte	0.375" inch
Grenstoerental	13000 rpm
Dynamische belasting	6.33 kN
Statische belasting	8.91 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE