


Naaldhulslager BA1816-Z-IKO - BA1816-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba1816-z-iko>

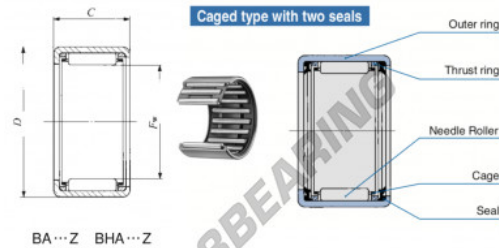

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable assembled rotational speed ⁽¹⁾	Assembled inner ring
F_w	D	C	d_2	Shaft dia. H_6	Housing bore dia. js_7	C	C_0	rpm		
	Max.	Max.	Max.	Min.	Max.	Min.	Min.	Min.	Min.	
28.575 (1.1243)	34.925 (1.375)	25.40 (1.000)	2.0					20500	40300	13000/RB 1418

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601278
Binnendiameter	28.575 mm
Buitendiameter	34.925 mm
Dikte	25.4 mm
Grenstoerental	13000 rpm
Dynamische belasting	20.5 kN
Statische belasting	40.3 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE