


Naaldhulslager BA1910-Z-IKO - BA1910-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba1910-z-iko>

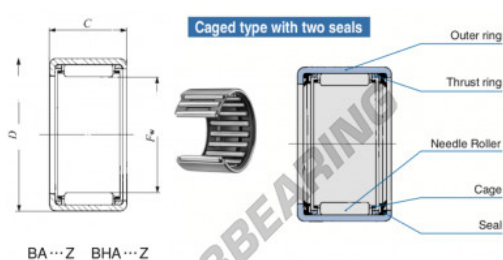

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring	
F_w	D	C	d_2	h_6	J_7		C	C_0	rpm		
			Max.	Max.	Min.	Max.	Min.	N	N	rpm	
35 162	1 38 100 (1 1 2)	15 88 625	2.8					15000	22500	12000	—

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601292
Binnendiameter	30.162 mm
Buitendiameter	38.1 mm
Dikte	15.88 mm
Grenstoerental	12000 rpm
Dynamische belasting	15 kN
Statische belasting	22.5 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE