


## Naaldhulslager BA218-Z-IKO - BA218-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba218-z-iko>

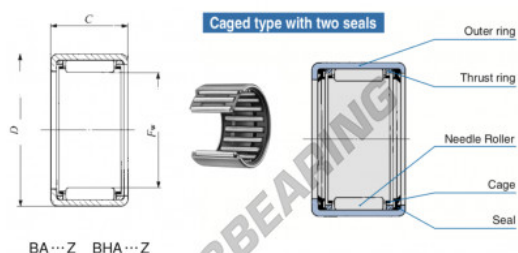

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(l)	Assembled inner ring
$F_w$	$D$	$C$	$d_2$	$H$	$J$	$C$	$C_0$	rpm		
33.338 (1.3125)	41.275 (1.625)	12.750 (0.502)	2.0	Min.	Max.	Min.	11000	15800	11000	

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601360
Binnendiameter	33.338 mm
Buitendiameter	41.275 mm
Dikte	12.7 mm
Grenstoerental	11000 rpm
Dynamische belasting	11.1 kN
Statische belasting	15.8 kN
Verpakking	1

[contact@123kogellager.be](mailto:contact@123kogellager.be)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE