


Naaldhulslager BA248-Z-IKO - BA248-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba248-z-iko>

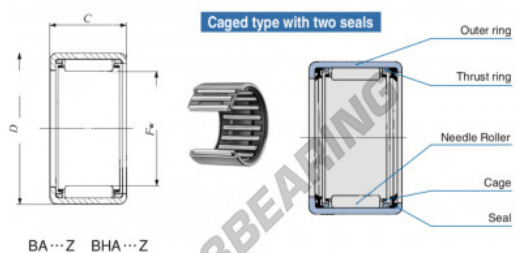

| Boundary dimensions mm(inch) | | | Standard mounting dimensions mm | | | | Basic dynamic load rating | Basic static load rating | Allowable rotational speed(1) | Assembled inner ring |
|------------------------------|----------------|-------------|---------------------------------|----------------------|-----------|-----------|---------------------------|--------------------------|-------------------------------|----------------------|
| <i>F_w</i> | <i>D</i> | <i>C</i> | <i>d2</i> | <i>b₂</i> | <i>d1</i> | <i>d3</i> | <i>C</i> | <i>C0</i> | rpm | |
| 36 100 (1 1/2) | 47.625 (1 7/8) | 12.70 (5/8) | 2.8 | Max. | Min. | Max. | Min. | 12900 | 17000 | 9000— |

PRODUCTKENMERKEN

| | |
|----------------------|---------------|
| Merk | IKO |
| N° Ean13 | 3616060601421 |
| Binnendiameter | 38.1 mm |
| Buitendiameter | 47.625 mm |
| Dikte | 12.7 mm |
| Grenstoerental | 9000 rpm |
| Dynamische belasting | 12.9 kN |
| Statische belasting | 17.9 kN |
| Verpakking | 1 |

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE