


Naaldhulslager BA2410-Z-IKO - BA2410-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba2410-z-iko>

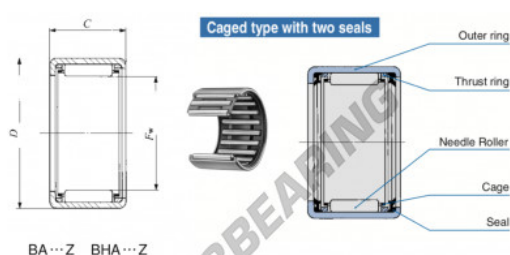

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r/min)	Assembled inner ring
F_w	D	C	d	D	C	C ₁₀	C ₀		
	Max.	Max.	Min.	Max.	Min.	N	N	rpm	
38.100 (1.12)	47.625 (1.875)	15.88 (0.625)	2.6			17800	27100	9000 (R3 2010)	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601438
Binnendiameter	38.1 mm
Buitendiameter	47.625 mm
Dikte	15.88 mm
Grenstoerental	9000 rpm
Dynamische belasting	17.8 kN
Statische belasting	27.1 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE