


Naaldhulslager BA2816-Z-IKO - BA2816-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba2816-z-iko>

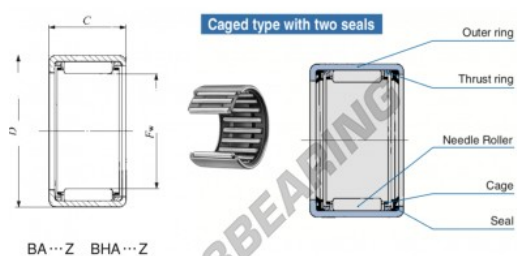

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(1)	Assembled inner ring
F_w	D	C	d_2	h_2	d_1	d_1	C	C_0	n	n_0
			Min.	Max.	Min.	Max.	Min.	N	N	rpm
44.450 (1.748)	53.975 (2.125)	25.40(1.000)	2.8					34800	67400	7500 (RB 2416)

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601520
Binnendiameter	44.45 mm
Buitendiameter	53.975 mm
Dikte	25.4 mm
Grenstoerental	7500 rpm
Dynamische belasting	34.8 kN
Statische belasting	67.4 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE