


Naaldhulslager BA3016-Z-IKO - BA3016-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba3016-z-iko>

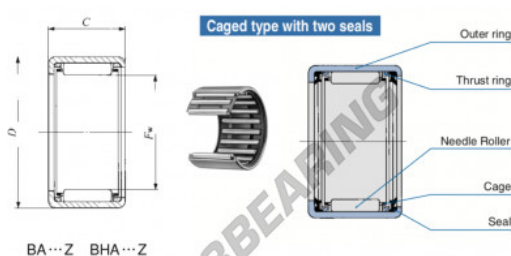

| Boundary dimensions mm(inch) | | | Standard mounting dimensions mm | | | | Basic dynamic load rating | Basic static load rating | Allowable rotational speed(1) | Assembled inner ring |
|------------------------------|--------------|---------------|---------------------------------|-------|------|------|---------------------------|--------------------------|-------------------------------|----------------------|
| F_w | D | C | c_2 | h_6 | JT | C | C_0 | n | N | n_{ring} |
| | | | Max. | Min. | Max. | Min. | | | | |
| 47.625 (1.8 & 9/16) | 57.15 (2.25) | 25.40 (1.000) | 2.8 | | | | | 95400 | 70400 | 7000— |

PRODUCTKENMERKEN

| | |
|----------------------|---------------|
| Merk | IKO |
| N° Ean13 | 3616060601568 |
| Binnendiameter | 47.625 mm |
| Buitendiameter | 57.15 mm |
| Dikte | 25.4 mm |
| Grenstoerental | 7000 rpm |
| Dynamische belasting | 35.4 kN |
| Statische belasting | 70.6 kN |
| Verpakking | 1 |

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE