


Naaldhulslager BA3216-Z-IKO - BA3216-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba3216-z-iko>

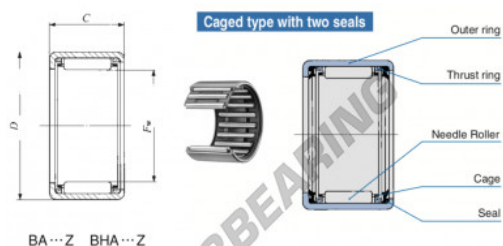

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
F_w	D	C	Mark dia. d_1	Min.	Max.	Mounting bore dia. d_2	C	CP	rpm	
50.800 (2)	60.325 (2.4 # 6)	25.4(1.000)	2.6							
							37100	76500	6000	RB 2816

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601582
Binnendiameter	50.8 mm
Buitendiameter	60.325 mm
Dikte	25.4 mm
Grenstoerental	6000 rpm
Dynamische belasting	37.1 kN
Statische belasting	76.5 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE