


Naaldhulslager BA348-Z-IKO - BA348-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba348-z-iko>

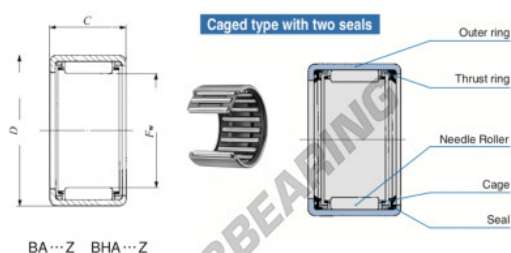

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed(r/min)	Assembled inner ring
F_w	D	C	d_1	d_2	d_1	d_2	C	C0			
	Max.	Min.	Max.	Min.	Max.	Min.	N	N	rpm		
53.975 (2 1/8)	63.500 (2 1/2)	12.701 (500)	2.6				16100	26600	5500	—	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601612
Binnendiameter	53.975 mm
Binnendiameter	2 1/8" inch
Buitendiameter	63.5 mm
Buitendiameter	2 1/2" inch
Dikte	12.7 mm
Dikte	1/2" inch
Grenstoerental	5500 rpm
Dynamische belasting	16.1 kN
Statische belasting	26.6 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE