


## Naaldhulslager BA4410-Z-IKO - BA4410-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba4410-z-iko>

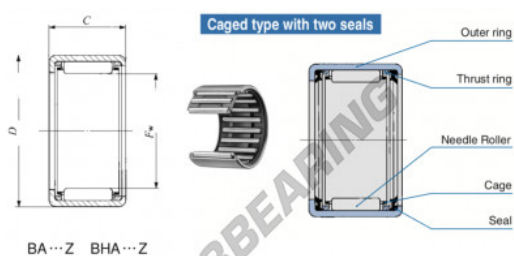

Boundary dimensions mm[inch]			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(T)	Assembled inner ring
$F_w$	$D$	$C$	$d_1$	$h_1$	$J_1$	$C$	$C_0$			
			Max.	Min.	Max.	Min.	Min.	Min.	rpm	
68.850 (2.711)	79.375 (3.125)	15.881 (0.625)	2.8					25000	50600	3500

### PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601650
Binnendiameter	69.85 mm
Buitendiameter	79.375 mm
Dikte	15.88 mm
Grenstoerental	3500 rpm
Dynamische belasting	25 kN
Statische belasting	50.8 kN
Verpakking	1

[contact@123kogellager.be](mailto:contact@123kogellager.be)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE