


Naaldhulslager BA4420-Z-IKO - BA4420-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba4420-z-iko>

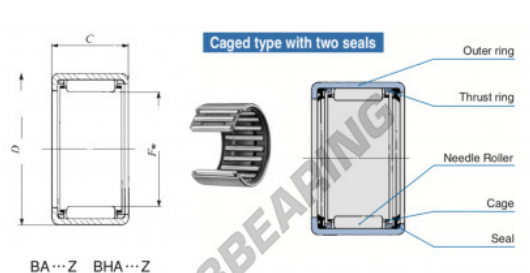

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable	Assembled
F_w	D	C	d_2	d_6	d_7		C	C_0	rotational speed(r)	inner ring		
09.850	12.84	79.375	31.75	1.250	2.8	Max.	Min.	Max.	Min.	54600	139000	3500/RR 4028

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601681
Binnendiameter	69.85 mm
Buitendiameter	79.375 mm
Dikte	31.75 mm
Grenstoerental	3500 rpm
Dynamische belasting	54.6 kN
Statische belasting	139 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE