


Naaldhulslager BA68-Z-IKO - BA68-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba68-z-iko>

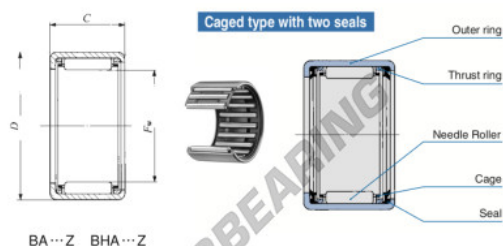

BA...Z BHA...Z

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable speed	Assembled inner ring	Assembled outer ring
F_w	D	C	d_2	h_0	d_1	d_2	C	C_0	rpm		
9.525 (3/8)	14.288 (9/16)	12.7 (5/8)	1	9.525	9.516	14.288	14.280	4.19	4900	40000	—

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601773
Binnendiameter	9.525 mm
Binnendiameter	3/8" inch
Buitendiameter	14.288 mm
Buitendiameter	9/16" inch
Dikte	12.7 mm
Dikte	1/2" inch
Grenstoerental	40000 rpm
Dynamische belasting	4.19 kN
Statische belasting	4.56 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE