


Naaldhulslager BA69-Z-IKO - BA69-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba69-z-iko>

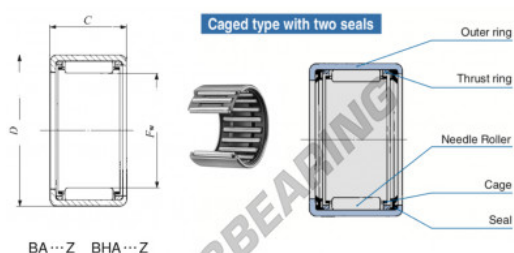

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(T)	Assembled inner ring
F_w	D	C	d_1	d_2	d_3	d_4	C'	C''		
			Max.	Min.	Max.	Min.	Min.	Min.	rpm	
9.525 (3/8)	14.288 (1/2)	14.271 (5/8)	1				4940	5630	40000	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601780
Binnendiameter	9.525 mm
Buitendiameter	14.288 mm
Dikte	14.27 mm
Grenstoerental	40000 rpm
Dynamische belasting	4.94 kN
Statische belasting	5.63 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE