


## Naaldhulslager BA610-Z-IKO - BA610-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba610-z-iko>

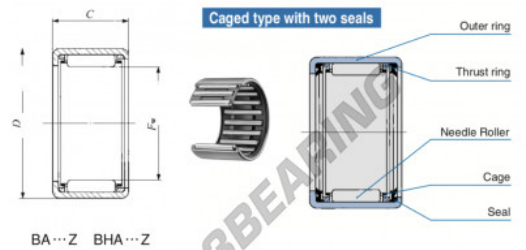

Boundary dimensions mm[inch]			Standard mounting dimensions mm				Basic dynamic	Basic static	Allowable	Assembled
$F_w$	$D$	$C$	$l_2$	$h_6$	$z_7$	load rating	load rating	rotational	inner ring	
			Max.	Min.	Min.	Max.	Min.	N	N	
9.525 (9/16)	14.288 (7/16)	15.88 (5/16)	1					9660	6700	40000

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060601797
Binnendiameter	9.525 mm
Buitendiameter	14.288 mm
Dikte	15.88 mm
Grenstoerental	40000 rpm
Dynamische belasting	5.66 kN
Statische belasting	6.7 kN
Verpakking	1

[contact@123kogellager.be](mailto:contact@123kogellager.be)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE