


Naaldhulslager BA710-Z-IKO - BA710-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba710-z-iko>

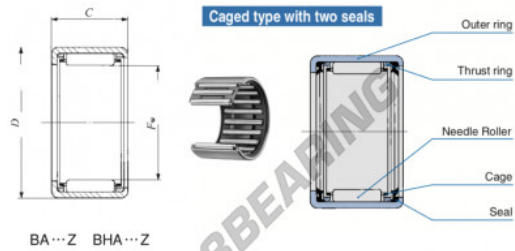

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(I)	Assembled inner ring
F_w	D	C	r_1	r_2	J	C	C_0	n		
			Max.	Min.	Max.	Min.	Min.	rpm		
11.112 (0.440)	15.875 (0.625)	12.700 (0.500)	11.112	11.101	15.865	15.867	4490	5130	35000	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060603036
Binnendiameter	11.112 mm
Buitendiameter	15.875 mm
Dikte	12.7 mm
Grenstoerental	35000 rpm
Dynamische belasting	4.46 kN
Statische belasting	5.13 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE