


Naaldhulslager BA88-Z-IKO - BA88-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba88-z-iko>

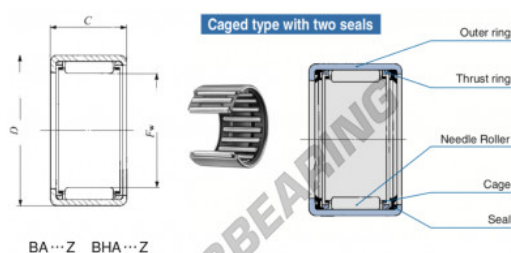

| Boundary dimensions mm(inch) | | | Standard mounting dimensions mm | | | | Basic dynamic load rating | Basic static load rating | Allowable rotational speed ⁽¹⁾ | Assembled inner ring | |
|------------------------------|----------------|--------------|---------------------------------|--------|--------|--------|---------------------------|--------------------------|---|----------------------|-------|
| F_w | D | C | d_2 | h_1 | d_1 | d_2 | C | C_0 | rpm | | |
| 12,700 (1/2) | 17,462 (0.686) | 12,750 (500) | 1 | 12,700 | 12,689 | 17,472 | 17,454 | 4710 | 5700 | 30000 | RB 58 |

PRODUCTKENMERKEN

| | |
|----------------------|---------------|
| Merk | IKO |
| N° Ean13 | 3616060603081 |
| Binnendiameter | 12.7 mm |
| Buitendiameter | 17.462 mm |
| Dikte | 12.7 mm |
| Grenstoerental | 30000 rpm |
| Dynamische belasting | 4.71 kN |
| Statische belasting | 5.7 kN |
| Verpakking | 1 |

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE