


Naaldhulslager BA118-Z-IKO - BA118-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba118-z-iko>

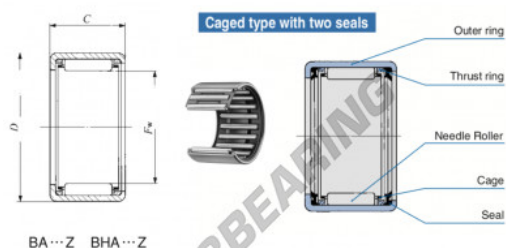

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring	
<i>F_w</i>	<i>D</i>	<i>C</i>	<i>r₂</i>	<i>r₁</i>	<i>r₁</i>	<i>C</i>	<i>C₀</i>	<i>n</i>	<i>N</i>		
	Max.	Max.	Min.	Max.	Min.	N	N	rpm			
17.462 (1116)	22.225 (8. 8)	12.726 (500)	1.3	17.462	17.451	22.227	22.216	6140	6055	25000	RB 88

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060603128
Binnendiameter	17.462 mm
Buitendiameter	22.225 mm
Dikte	12.7 mm
Grenstoerental	25000 rpm
Dynamische belasting	6.14 kN
Statische belasting	88.5 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE