


## Naaldhulslager BA1212-Z-IKO - BA1212-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba1212-z-iko>

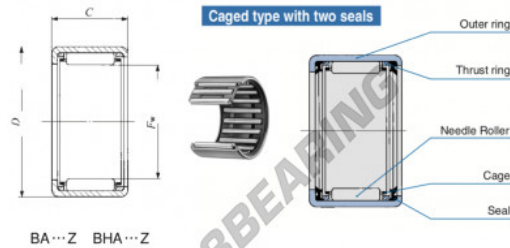

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable	Assembled
$F_w$	$D$	$C$	$r_2$	$b_6$	Housing bore dia.		$C$	$C_0$	speed (1)	inner ring	
	Min.	Max.	Min.	Min.	Min.	Max.	N	N	rpm		
19.050 (0.4)	25.400 (1)	19.050 (750)	1.3	19.050	19.037	25.412 (25.391)	11900	17700	20000	IRB #12-1	

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060603180
Binnendiameter	19.05 mm
Buitendiameter	25.4 mm
Dikte	19 mm
Grenstoerental	20000 rpm
Dynamische belasting	11 kN
Statische belasting	17 kN
Verpakking	1

[contact@123kogellager.be](mailto:contact@123kogellager.be)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE