


Naaldhulslager BA146-Z-IKO - BA146-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba146-z-iko>

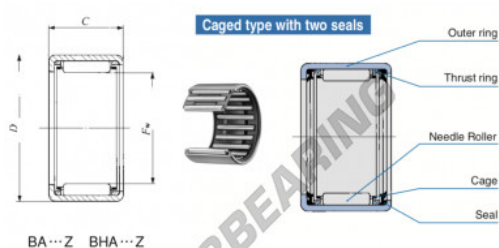

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring
F_w	D	C	d_1	d_2	d_3	d_4	C	C_0	rpm	
			Max.	Max.	Min.	Max.	Min.	N	N	
22.225 (A 8)	26.975 (1 1/8)	9.52 (.375)	22.225	22.212		26.987	26.969	5430	6740	18000 (RB 106)

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060603289
Binnendiameter	22.225 mm
Binnendiameter	7/8" inch
Buitendiameter	26.988 mm
Buitendiameter	1 1/16" inch
Dikte	9.52 mm
Dikte	0.375" inch
Grenstoerental	18000 rpm
Dynamische belasting	5.43 kN
Statische belasting	6.74 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE