


Naaldhulslager BA148-Z-IKO - BA148-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba148-z-iko>

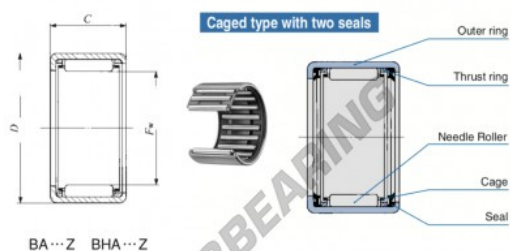

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled outer ring
P_{10}	D	C	$i2$	$s4$	$J7$	C	$C0$	n	n	RB 198
Max.	Max.	Min.	Max.	Min.	Max.	Min.	N	N	rpm	
22.225 (A 8)	28.575 (1 1/8)	12.75 (500)	2.6	22.225	22.212	28.587	28.566	7440	10100	18000

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060603296
Binnendiameter	22.225 mm
Buitendiameter	28.575 mm
Dikte	12.7 mm
Grenstoerental	18000 rpm
Dynamische belasting	7.44 kN
Statische belasting	10.1 kN
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE