


## Naaldhulslager BA1422-Z-IKO - BA1422-Z-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/ba1422-z-iko>

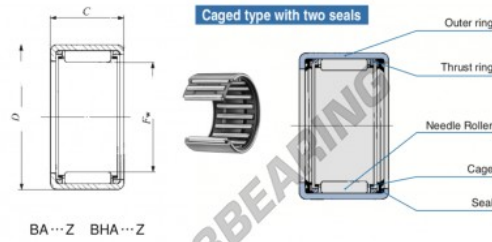

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable relative speed <sup>(1)</sup>	Assembled inner ring
$F_w$	$D$	$C$	$d_1$	$d_2$	$d_3$	$C$	$C_0$	rpm		
22,225 (8.8)	28,575 (1.125)	34,921 (1.375)	22,225	22,212	28,567	24,100	45,700	18000	IRB 1922	

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060603340
Binnendiameter	22.225 mm
Buitendiameter	28.575 mm
Dikte	34.92 mm
Grenstoerental	18000 rpm
Dynamische belasting	24.1 kN
Statische belasting	45.7 kN
Verpakking	1

[contact@123kogellager.be](mailto:contact@123kogellager.be)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE