


Naaldhulslager NK2216-JTEKT - NK2216-JTEKT

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/nk2216-jtekt>

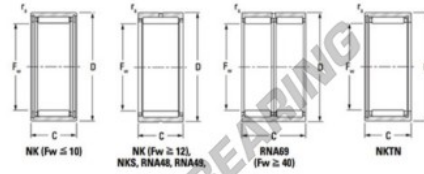

Mini-series, caged, without inner ring

| Bearing No. | Boundary dimensions (mm) | | | | Basic load ratings (kN) | | Fatigue load limit (kN) | Limiting speeds (min ⁻¹) | |
|-------------|--------------------------|----|----|-----|-------------------------|-----------------|-------------------------|--------------------------------------|----------|
| | F _w | D | C | d | C _r | C _{0r} | C ₀ | Grease lub. | Oil lub. |
| NK22/16 | 22 | 30 | 16 | 0.3 | 15.2 | 21.7 | 3.3 | 13000 | 20000 |

PRODUCTKENMERKEN

| | |
|----------------------|---------------|
| Merk | JTEKT |
| N° Ean13 | 3616060631411 |
| Binnendiameter | 22 mm |
| Buitendiameter | 30 mm |
| Dikte | 16 mm |
| Grenstoerental | 13000 rpm |
| Dynamische belasting | 15.2 kN |
| Statische belasting | 21.7 kN |
| Verpakking | 1 |

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE