Naaldhulslager
BAM1216-IKO - BAM1216-IKO

https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/bam1216-iko

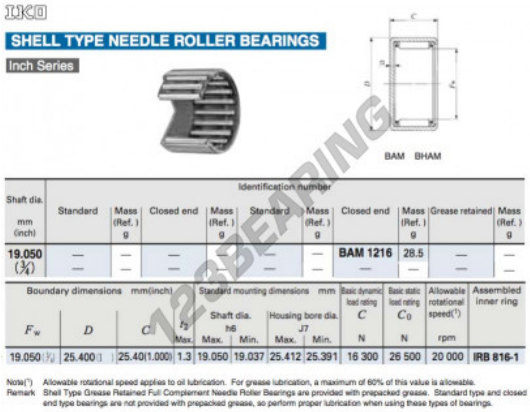

IKO

SHELL TYPE NEEDLE ROLLER BEARINGS

Inch Series

BAM BHAM

Shaft dia. mm (inch)	Identification number: Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Grease retained	Mass (Ref.) g
19.050 (3/4)	— —	— —	— —	— —	— —	— —	BAM 1216 —	28.5 —	— —	— —

Boundary dimensions mm(inch) F_w	D	C	r_s Max.	Standard mounting dimensions mm: Shaft dia. h6 Max.	Shaft dia. h6 Min.	Housing bore dia. J7 Max.	Housing bore dia. J7 Min.	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed(1) rpm	Assembled inner ring
19.050 (3/4)	25.400 (1)	25.40(1.000)	1.3	19.050	19.037	25.412	25.391	16 300	26 500	20 000	IRB 816-1

Note(1) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.
Remark Shell Type Grease Retained Full Complement Needle Roller Bearings are provided with prepacked grease. Standard type and closed end type bearings are not provided with prepacked grease, so perform proper lubrication when using these types of bearings.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952173030
Binnendiameter	19.05 mm
Binnendiameter	3/4" inch
Buitendiameter	25.4 mm
Buitendiameter	1" inch
Dikte	25.4 mm
Dikte	1" inch
Verpakking	1

contact@123kogellager.be
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE