

Naaldtaatslager


AZ355212-IKO - AZ355212-IKO

https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldtaatslager/az355212-iko

IKO

THRUST BEARINGS

Thrust Roller Bearings

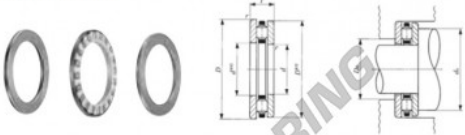

Identification number									
Shaft dia. mm	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g		
35	AZ 355212	99	AZK 35525	36	WS 3552	GS 3552	31.5		

Boundary dimensions mm									
d	D	T	d _c	D _c	D _w	B	r ₁ min	C ₁	C ₂
35	52	12	35.05	51.5	5	3.5	0.6	38	49

Bore mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾
d ₁	D ₁	N	N	rpm
49	39	29 100	91 100	7 000

Notes⁽¹⁾

Minimum allowable value of chamfer dimension r

⁽²⁾

Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060465931
Binnendiameter	35 mm
Buitendiameter	52 mm
Dikte	12 mm
Gewicht	99 g
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE