# SA Stangkop
# PM17-01-502-DURBAL - PM17-01-502-DURBAL

https://www.123kogellager.be/kogellager-behuizing/stangkop/sa/pm17-01-502-durbal

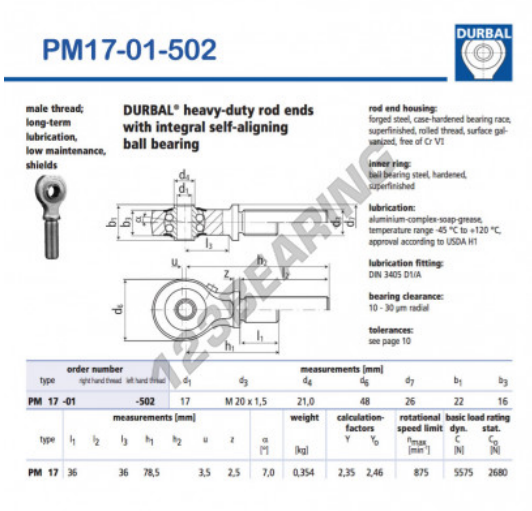

PM17-01-502

DURBAL

male thread; long-term lubrication, low maintenance, shields

**DURBAL® heavy-duty rod ends with integral self-aligning ball bearing**

**rod end housing:** forged steel, case-hardened bearing race, superfinished, rolled thread, surface galvanized, free of Cr VI

**inner ring:** ball bearing steel, hardened, superfinished

**lubrication:** aluminium-complex-soap-grease, temperature range -45 °C to +120 °C, approval according to USDA H1

**lubrication fitting:** DIN 3405 D1/A

**bearing clearance:** 10 - 30 µm radial

**tolerances:** see page 10

| type | order number right hand thread | order number left hand thread | $d_1$ | $d_3$ | $d_4$ | $d_6$ | $d_7$ | $b_1$ | $b_3$ |
|---|---|---|---|---|---|---|---|---|---|
| PM 17 | -01 | -502 | 17 | M 20 x 1,5 | 21,0 | 48 | 26 | 22 | 16 |

| type | $l_1$ | $l_2$ | $l_3$ | $h_1$ | $h_2$ | u | z | α [°] | weight [kg] | calculation-factors Y | $Y_0$ | rotational speed limit $n_{max}$ [min⁻¹] | basic load rating dyn. C [N] | stat. $C_0$ [N] |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| PM 17 | 36 | | 36 | 78,5 | | 3,5 | 2,5 | 7,0 | 0,354 | 2,35 | 2,46 | 875 | 5575 | 2680 |

123BEARING

## PRODUCTKENMERKEN

| | |
|---|---|
| Merk | DURBAL |
| N° Ean13 | 3663952507682 |
| Binnendiameter | 17 mm |
| Buitendiameter | 48 mm |
| Dikte | 22 mm |
| Type | SA |
| Gewicht | 354 g |
| Draad | Linkse draad |
| Smering | met |
| Verpakking | 1 |

contact@123kogellager.be
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE