


Kegelager 33028-JR-JTEKT - 33028-JR-JTEKT

<https://www.123kogellager.be/kogellager-behuizing/rollager/kegellager/33028-jr-jtekt>

Single-row tapered roller bearings
metric series

Koyo

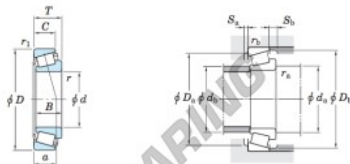

| Boundary dimensions (mm) | | | | | Basic load ratings (kN) | | | | Limiting speeds (min ⁻¹) | | Bearing No. ¹⁾ | | | |
|--|--------------------|--------------------------|----------------------|----------------------|-------------------------|----------------------|----------------------|----------------------|--------------------------------------|------------|---------------------------|----------------|----------------------|------|
| d | D | T | B | C | C _r | C _{0r} | C ₉₀ | C ₁₀₀ | Grease lub. | Oil lub. | | | | |
| 140 | 210 | 56 | 56 | 44 | 406 | 758 | 1 600 | 2 200 | | | 33028JR | | | |
| Dimension series to ISO 995 (Refer. 1) | Load center (mm) a | Mounting dimensions (mm) | | | | | | | | Constant e | Axial load factors | | (Refer. 1) Mass (kg) | |
| | | d _{1a} min. | d _{1a} max. | D _{1a} min. | D _{1a} max. | S _{1a} min. | S _{1a} max. | r _{1a} min. | r _{1a} max. | | Y ₁ | Y ₀ | | |
| 20E | 45.6 | 152 | 152 | 200 | 186 | 202 | 7 | 12 | 2 | 2 | 0.36 | 1.67 | 0.92 | 6.61 |

PRODUCTKENMERKEN

| | |
|----------------|---------------|
| Merk | JTEKT |
| N° Ean13 | 4549250126109 |
| Binnendiameter | 140 mm |
| Buitendiameter | 210 mm |
| Dikte | 56 mm |
| Verpakking | 1 |

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE