


Kegelager 4C-6-TIMKEN - 4C-6-TIMKEN

<https://www.123kogellager.be/kogellager-behuizing/rollager/kegellager/4c-6-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • TYPE TS

TYPE TS

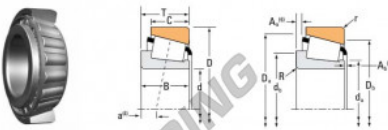

| Bearing Dimensions | | | Load Ratings | | | | | | Part Number | |
|--------------------|--------|---------|---------------------------------------|-------------------------|--|-------------------------|-----------------------|-------|-------------|--|
| Bore d | O.D. D | Width B | Dynamic ⁽¹⁾ C ₁ | Factor ⁽²⁾ e | Dynamic ⁽¹⁾ C _{2e} | Factor ⁽²⁾ K | Static C ₂ | Inner | Outer | |
| mm | mm | mm | N | | N | | N | | | |
| 17.462 | 44.450 | 12.700 | 20500 | 0.67 | 1390 | 1.22 | 29000 | 4C | 6 | |
| 0.6875 | 1.7500 | 0.5000 | 4550 | | 1190 | | 6400 | | | |

| Bearing Dimensions | | | | | | | | | | Geometry Factors | | | Bearing Weight |
|--------------------|---------|-----------|--|--------------------------------------|--|--------------------------------------|------------------------------------|------------------------------------|----------------|------------------|----------------|-----|----------------|
| Width B | Width C | ER Co. μm | Max Shaft Fillet Radius R _f | Backing Shoulder Dia. d _s | Max Housing Fillet Radius r ₁ | Backing Shoulder Dia. D _s | Cage A ₁ ⁽¹⁾ | Cage A ₂ ⁽¹⁾ | G ₁ | G ₂ | C ₃ | | |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | | | | kg | |
| 11.800 | 9.525 | -1.8 | 1.5 | 22.8 | 24.5 | 1.5 | 41.8 | 38.0 | 0.8 | 1.6 | 4.6 | 2.6 | 0.0406 |
| 0.4600 | 0.3750 | -0.07 | 0.08 | 0.87 | 0.96 | 0.08 | 1.61 | 1.50 | 0.03 | 0.07 | | | 0.09 |

PRODUCTKENMERKEN

| | |
|----------------|---------------|
| Merk | TIMKEN |
| N° Ean13 | 3663952309637 |
| Binnendiameter | 17.46 mm |
| Buitendiameter | 44.45 mm |
| Dikte | 12.7 mm |
| Verpakking | 1 |

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE