


Naaldhulslager GBRI203320-UU-IKO - GBRI203320-UU-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/gbri203320-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

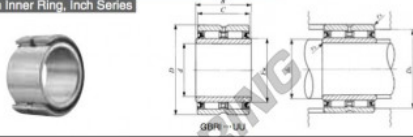

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
31.750 (1 1/4)	GBRI 203320 UU		286	31.750 (1 1/4)	52.388 (2 1/16)	31.750 (1 1/4)			
B	F _w	Standard mounting dimensions - mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		Min.	Max.	D _s Max.					r _{as max} ⁽¹⁾
32.000	38.100 (1 1/2)	37	37.1	47.3	0.6	54 200	97 700	2 000	LRBZ 202420

Note(1) Minimum allowable value of chamfer dimension r
 (2) Allowable rotational speed applies to grease lubrication.
 Remark: This roller ring has an oil groove and an oil hole.
 2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952383408
Binnendiameter	31.75 mm
Binnendiameter	1 1/4" inch
Buitendiameter	52.388 mm
Buitendiameter	2 1/16" inch
Dikte	31.75 mm
Dikte	1 1/4" inch
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE