

Naaldhulslager


NAFW173532-IKO - NAFW173532-IKO

https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/nafw173532-iko

IKO

NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE

With Inner Ring

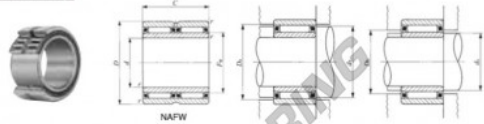

NAFW

| Shaft dia.<br>mm | Identification number | Mess<br>(Ref.) | Boundary dimensions mm |    |    |                                      |                | Standard mounting dimensions mm |                        |                        |                        |
|------------------|-----------------------|----------------|------------------------|----|----|--------------------------------------|----------------|---------------------------------|------------------------|------------------------|------------------------|
|                  |                       | g              | d                      | D  | C  | <sup>(1)</sup><br>r <sub>s</sub> min | F <sub>w</sub> | d <sub>b</sub>                  | D <sub>s</sub><br>Max. | d <sub>s</sub><br>Min. | D <sub>s</sub><br>Max. |
| 17               | NAFW 173532           | 155            | 17                     | 35 | 32 | 0.3                                  | 22             | 27.8                            | 33                     | 19                     | 21                     |

| Basic dynamic load rating<br>C | Basic static load rating<br>C <sub>0</sub> | Allowable rotational speed<br>(°) | Assembled inner ring |
|--------------------------------|--------------------------------------------|-----------------------------------|----------------------|
| N                              | N                                          | rpm                               |                      |
| 30 200                         | 41 800                                     | 25 000                            | LRT 172232           |

Notes:

(1)

Remark:

Minimum allowable value of diameter dimension r

Allowable rotational speed applies to grease lubrication.

The outer ring has an oil groove and an oil hole.

2

Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

PRODUCTKENMERKEN

|                |               |
|----------------|---------------|
| Merk           | IKO           |
| N° Ean13       | 3663952384498 |
| Binnendiameter | 17 mm         |
| Buitendiameter | 35 mm         |
| Dikte          | 32 mm         |
| Verpakking     | 1             |

[contact@123kogellager.be](mailto:contact@123kogellager.be)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE