


## GE Stangkop SB9014076-IKO - SB9014076-IKO

<https://www.123kogellager.be/kogellager-behuizing/stangkop/ge/sb9014076-iko>

**IKO**  
**SPHERICAL BUSHINGS**  
Steel-on-steel Spherical Bushings

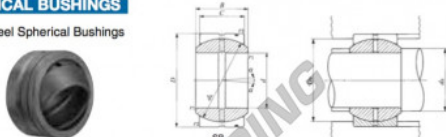

Shaft dia. mm	Identification number	Mass (Ref.) kg	Boundary dimensions mm						Permissible tilting angle degree
			$d$	$D$	$B$	$C$	$d_k$	$r_1$ mm	
90	<b>SB 9014076</b>	4.71	90	140	76	65	130	0.6	5
Mounting dimensions mm		Dynamic load capacity $C_d$ N	Static load capacity $C_s$ N						
$d_s$	$D_s$		$C_d$	$C_s$					
Min. Max. <sup>(2)</sup>	Max. Min.	N	N						
94.5 105.5	135.5 121	829 000	4 970 000						

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimensions  $r_1$  and  $r_2$ .  
<sup>(2)</sup> When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of  $d_s$ .  
Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.  
2. Not provided with prepacked grease. Perform proper lubrication for use.

### PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952391496
Binnendiameter	90 mm
Binnendiameter	3.543" inch
Buitendiameter	140 mm
Buitendiameter	5.512" inch
Dikte	76 mm
Dikte	2.992" inch
Type	GE
Smering	zonder
Verpakking	1

[contact@123kogellager.be](mailto:contact@123kogellager.be)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE