


Nokrollen CF-SFU-20-B-IKO - CF-SFU-20-B-IKO

<https://www.123kogellager.be/kogellager-behuizing/kogellager/nokrollen/cf-sfu-20-b-iko>

IKO

CAM FOLLOWERS

Easy Mounting Type Cam Followers With Cage/With Hexagon Hole

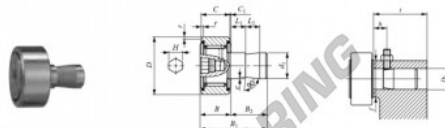

CF-SFU-B

| Stud dia. mm | Identification number | Mass (Ref.) g | Boundary dimensions mm | | | | | | | |
|-----------------|--------------------------|---------------------|------------------------|-----|-------|------------|--------------|-------|-------|-------|
| | | | D | C | d_1 | B max | B_1 max | B_2 | C_1 | L_1 |
| 20 | CF-SFU-20 B | 435 | 52 | 24 | 20 | 25.6 | 50.5 | 24.9 | 0.8 | 10 |

| L_2 | H | e | r_1 mm ^(*) | D_1 | Mounting dimensions mm | | | | Basic dynamic load rating C N | Basic static load rating C_0 N | Maximum allowable static load N |
|-------|-----|-----|----------------------------|-------|------------------------|-------------|-------------|---------------|--|---|--|
| | | | | | Tolerance | t Min. | f Min. | h (Ref.) | | | |
| 10 | 8 | 1 | 1 | 20 | +0.021 0 | 25 | 34 | 15 | 20 700 | 34 600 | 34 600 |

PRODUCTKENMERKEN

| | |
|----------------|---------------|
| Merk | IKO |
| N° Ean13 | 3616060461810 |
| Binnendiameter | 20 mm |
| Buitendiameter | 52 mm |
| Dikte | 24 mm |
| Gewicht | 435 g |
| Verpakking | 1 |

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE