


Nokrollen CR32-BR-IKO - CR32-BR-IKO

<https://www.123kogellager.be/kogellager-behuizing/kogellager/nokrollen/cr32-br-iko>

IKO

CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Hexagon Hole

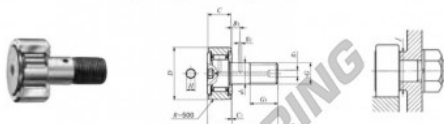

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d ₁	G UNF	G ₁	
	Shield type With covered outer ring	Shield type With cylindrical outer ring	Sealed type With covered outer ring	Sealed type With cylindrical outer ring							
22.225 ($\frac{7}{8}$)	CR 32	BR			615	50.800 (2)	31.750 (1.25)	22.225 (7/8)	7/8-14	25.400 (1)	
Boundary dimensions mm(inch)											
B	B ₂	B ₃	C ₁	E ₁	E ₂	H	r	Bearing dimension f Mm (mm/inch)	Maximum tightening torque C N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N
33.5 (1.32)	50.800 (2)	12.700 (1/2)	0.794 (1/32)	4.762 (3/8)	4.762 (3/8)	11.112 (3/4)	1.588 (1/8)	37.306 (1 1/2)	192	32 500	63 900

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060462701
Binnendiameter	22.225 mm
Buitendiameter	50.8 mm
Dikte	31.75 mm
Gewicht	615 g
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE